


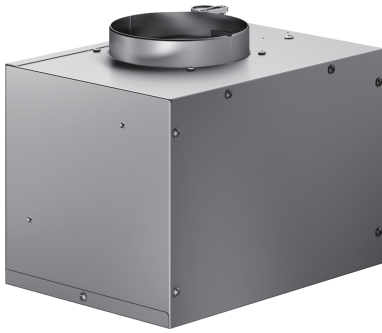

AR400143

Remote fan unit 400 series

AR400143

- Powerful remote fan unit to combine with motorless appliances
- Efficient BLDC technology
- Compact, space-saving installation in the chimney of AW 442
- Air output according to EN 61591 - max. 1065 m³/h.
- Sound power level depends on the built-in situation.
- Powerful remote fan unit to combine with motorless appliances

Efficient BLDC technology

Compact, space-saving installation in the chimney of AW 442

Output

Air output according to EN 61591 - max. 1065 m³/h.

Sound power level depends on the built-in situation.

Power levels depend on the motorless appliances

Features

3 electronically controlled power levels and one intensive mode.

Fan technology with highly efficient, brushless DC motor (BLDC).

Including sound insulation to minimise the noise level.

Metal housing, zinc-plated.

Pipe connection pieces on output side: 1x NW 150 round.

Planning notes

Remote fan unit in combination with the motorless AW 442.

Connection to the respective appliances via network cable.

Installation in the chimney of AW 442.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 230 W.

Connecting and network cable included in delivery.

