



RT202180



Included accessories

- 1 x egg tray
- 1 x ice cube tray

Optional accessories

RA430100:
Storage container with lid, anthracite

Built-under fridge with freezer section 200 series
82 x 60 cm
RT202180

- Immerse your kitchen in a mesmerizing glow with Gaggenau's Glare-Free LED Light Spots and showcase your dishes like never before.
 - Interior with solid elements in light satin aluminium
- Height-adjustable safety glass shelf with aluminium profile
Warm white and glare-free LED light
Drawer with solid aluminium handle, close to 0 °C
Cushioned door closing system allowing a soft and controlled door closure
Total volume 110 litres

Handling

LED electronic with touch control.

Features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door alarm.
Holiday mode.
Rest mode.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.
Remote diagnostics.

Cooling

Fast cooling.
Temperature adjustable from +2 °C to +6 °C.
1 height-adjustable safety glass shelf with aluminium profile.
1 drawer with solid aluminium handle, close to 0 °C, ideal for meat, fish and poultry.
1 bottom compartment with sliding glass lid.
1 large aluminium door rack for bottles, extra deep.
1 height-adjustable aluminium door rack.
1 adjustable door rack, small.
Warm white interior lighting (3500 K) with integrated glare-free LED side light.
Total volume all refrigerator compartments 93 litres.

Freezing

Storage temperature -18 °C and lower.
4-star freezer compartment.
Freezing capacity 3 kg /24 h.
Storage time after a malfunction 9 h.
Volume 17 litres.

Product rating

Energy efficiency class D at a range of energy efficiency classes from A to G.
Energy consumption 119 kWh/year.
Noise level 35 dB (A) re 1 pW.


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 12 kg.
Height-adjustable feet.

The enclosed ventilation grille must be used.
The main socket needs to be planned outside of the niche.

Connection

Connecting cable 2.3 m with plug.

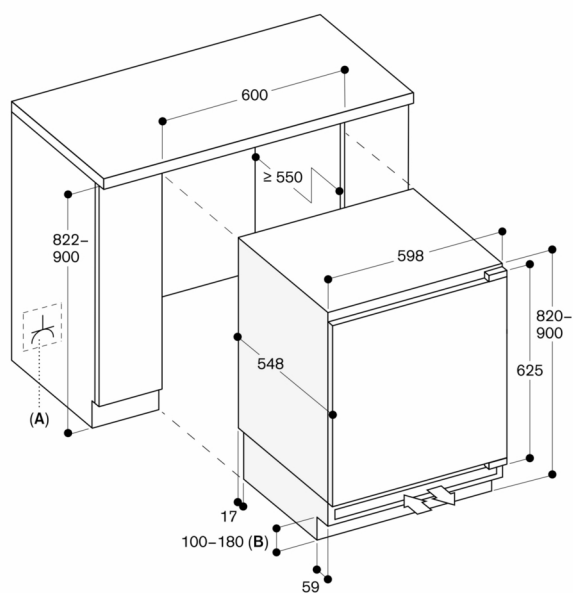

A: Socket

B: Base height:

- 100 mm when niche height is 822 mm
- 180 mm when niche height is 900 mm

Measurements in mm